

Suedette


SUNNIEST® Collection

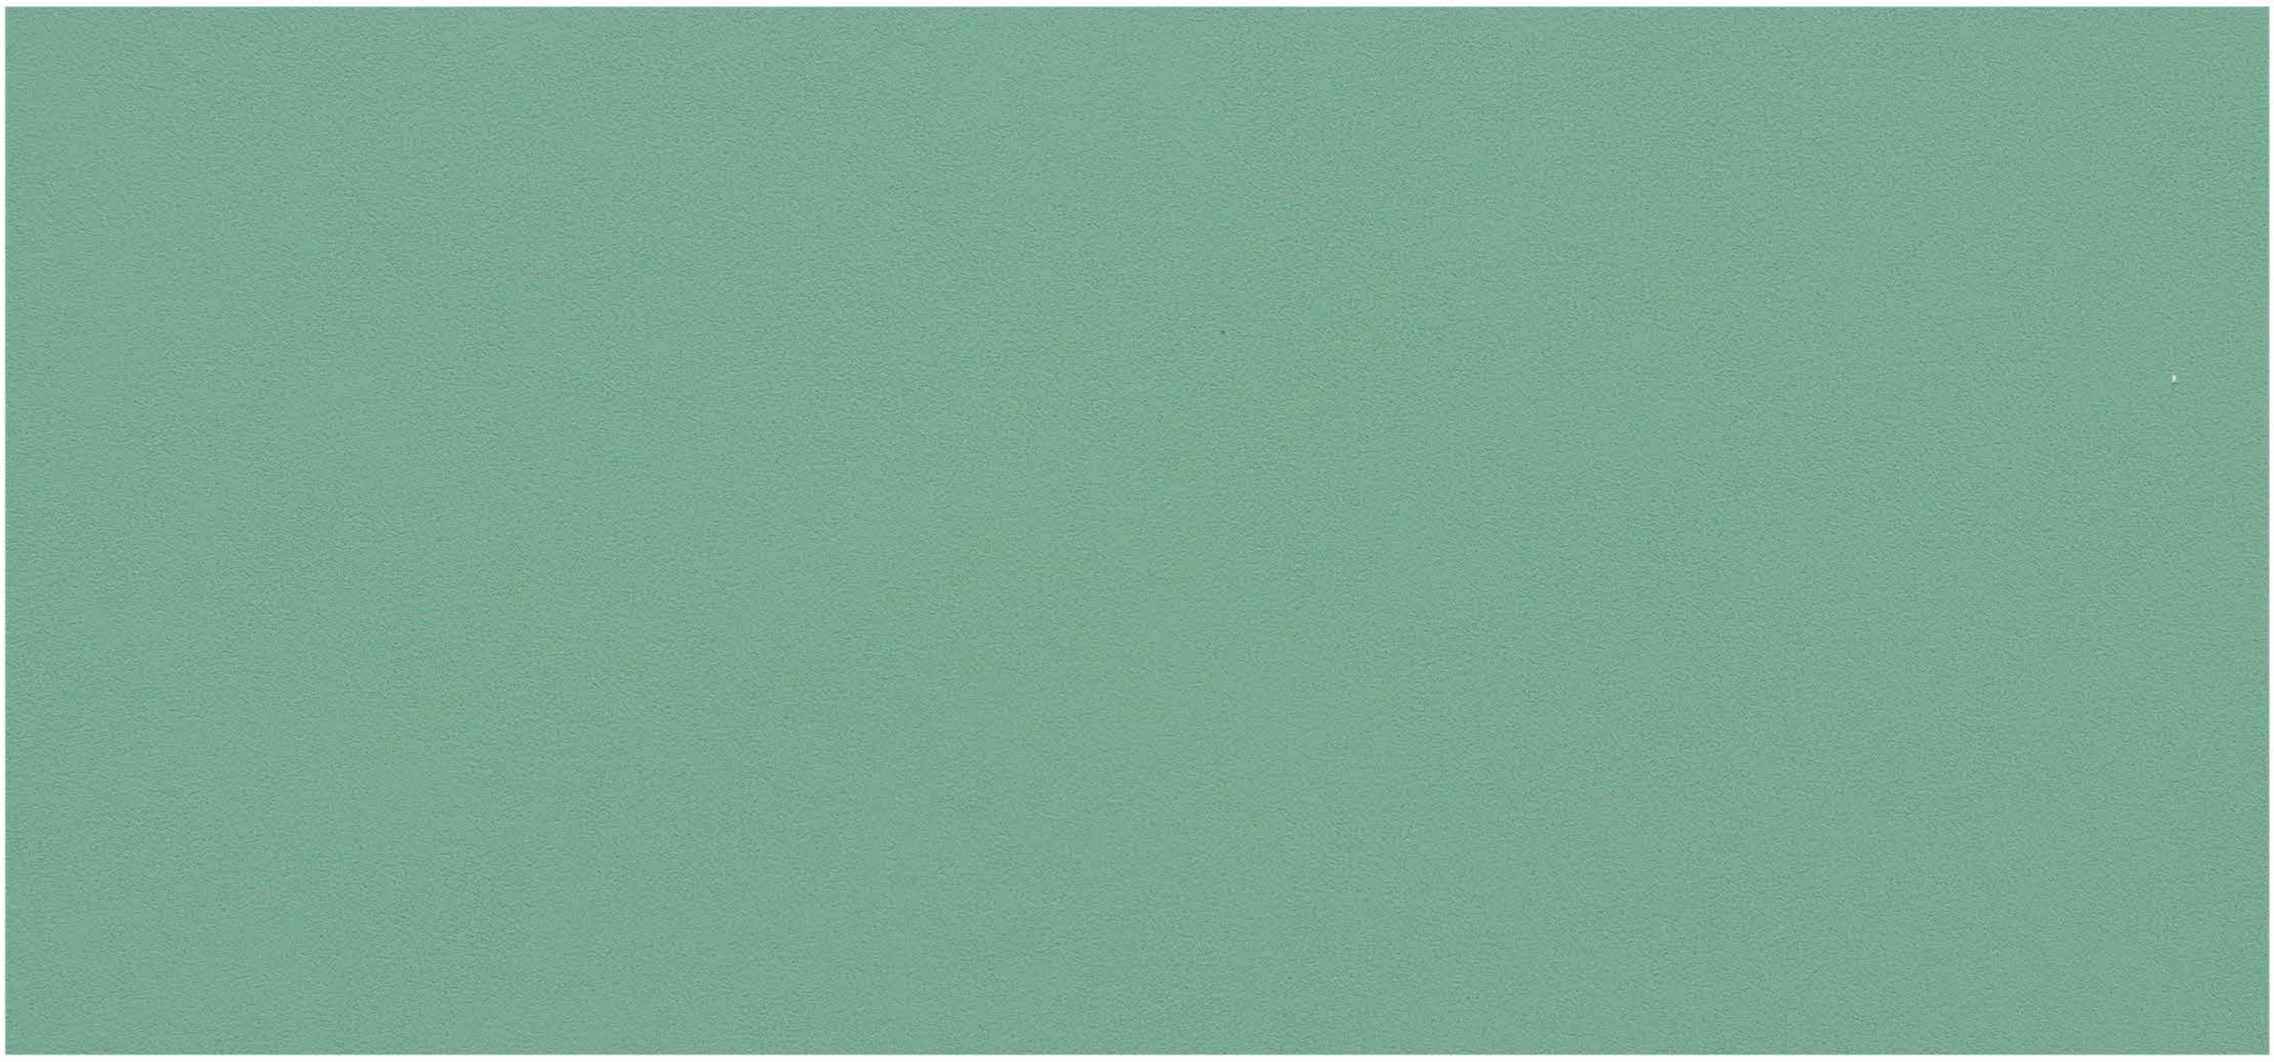


Lichen SD-01

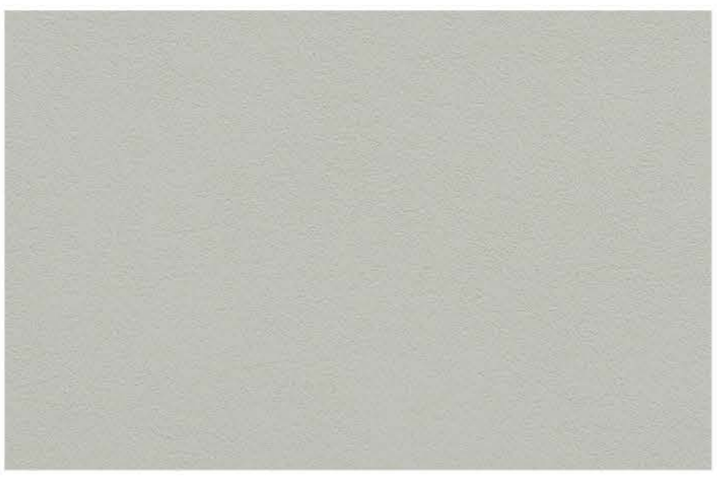

Vaporous Gray SD-02

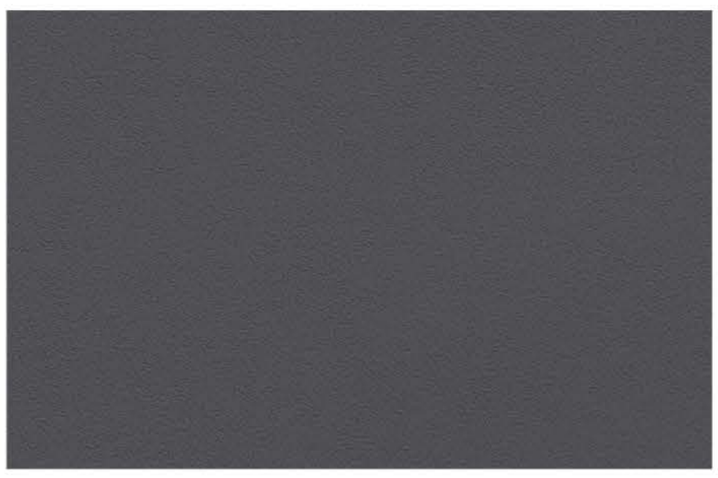

Steel Gray SD-03

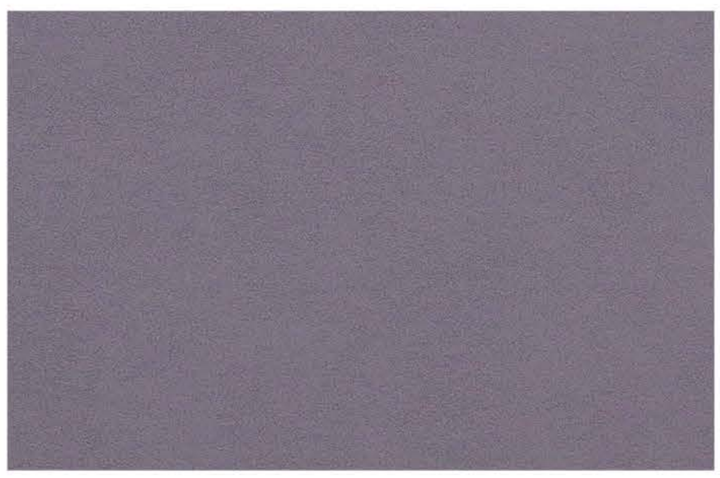

Purple Ash SD-04



Nightshadow Blue SD-06




Blue Wing Teal SD-06




Pageant Blue SD-07



Red Mahogany SD-08

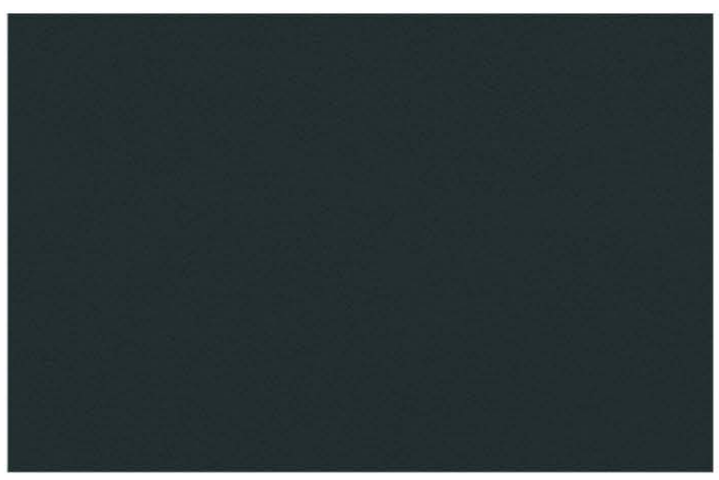


Green Gables SD-09

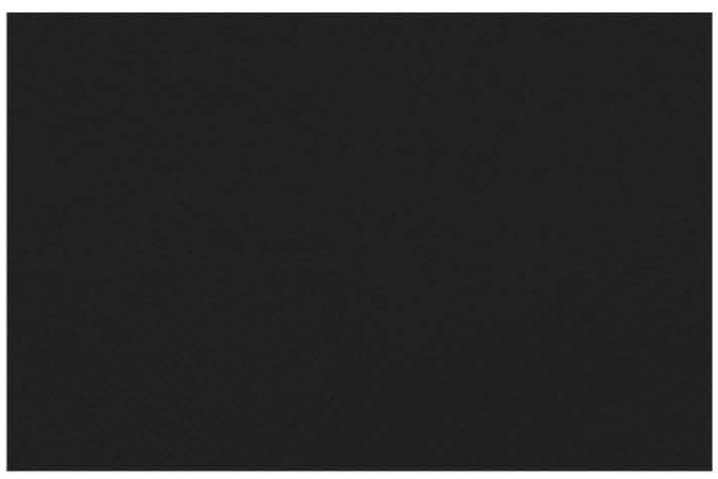

Black SD-10

Suedette

Recommended Applications

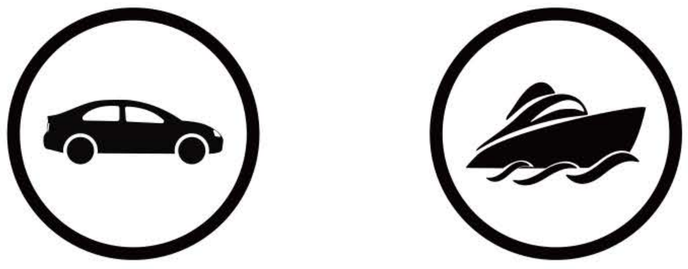

Automotive

Marine

Specification

Surface Composition	100% PVC
Thickness	1.0 mm
Width	54" / 137cm
Backing	100% Polyester Knitted Fabric
Weight	40 oz per linear yard / 910 gsm
Abrasion Resistance	250,000+ Double Rubs ASTM D 4157-13 Wyzenbeek
UV Resistance	650 Hours ASTM G154-12a
Colorfastness to Light	650 Hours AATCC 16.3-2014, Option 3
Cold Crack	-23°C per Federal Standard No.191A-TM5874 / CFFA-6a-2007
Mildew Resistance	ASTM G21-00
Flame Retardancy	FMVSS 302, CA117-2013, UFAC CLASS I, NFPA260

EN 71-3 Safety of Toys (Migration of certain elements)
BPA Free
Formaldehyde Free
7P Phthalate Free
Lead / Heavy Metal Free
RoHS Compliant

YAMEI PLASTICS
亞美塑膠

Nantong Yamei Plastics Co., Ltd.
james@yameiplastics.com